


Tech Support 1-800-34-VICON  
 www.vicon-cctv.com

V1311RB TO V1411X-DVC Rj45 Termination Box		V1411X-DVC Rj45 Termin Box	
TB1-8	Resp Out -	Screw 6	Resp In -
TB1-7	Resp Out +	Screw 3	Resp In +
TB1-6	Gnd/Shield	Screw 8	Gnd/Shield
TB1-11	Cmd In -	Screw 5	Cmd Out -
TB1-10	Cmd In +	Screw 4	Cmd Out +
—	—	Screw 1,2	12VDC

PTZ to V1311RB to Motorized Lens			
PTZ	V1311RB	Motorized Lens	
Pin 1	TB2-2	Tilt Com	Pin 2
Pin 2	TB2-6	Tilt Up	Pin 3
Pin 3	TB2-7	Tilt Down	Pin 4
Pin 4	TB2-1	Pan Com	Pin 5
Pin 5	TB2-4	Pan Right	Pin 6
Pin 6	TB2-5	Pan Left	Pin 7
Pin 7	TB2-3	Gnd	Pin 8
Pin 8	TB2-8	Auto Pan	Pin 2
	TB2-9	Zoom	Pin 3
	TB2-10	Focus	Pin 1
	TB2-11	Iris	Pin 1
	TB2-12	Lens Gnd	Pin 4

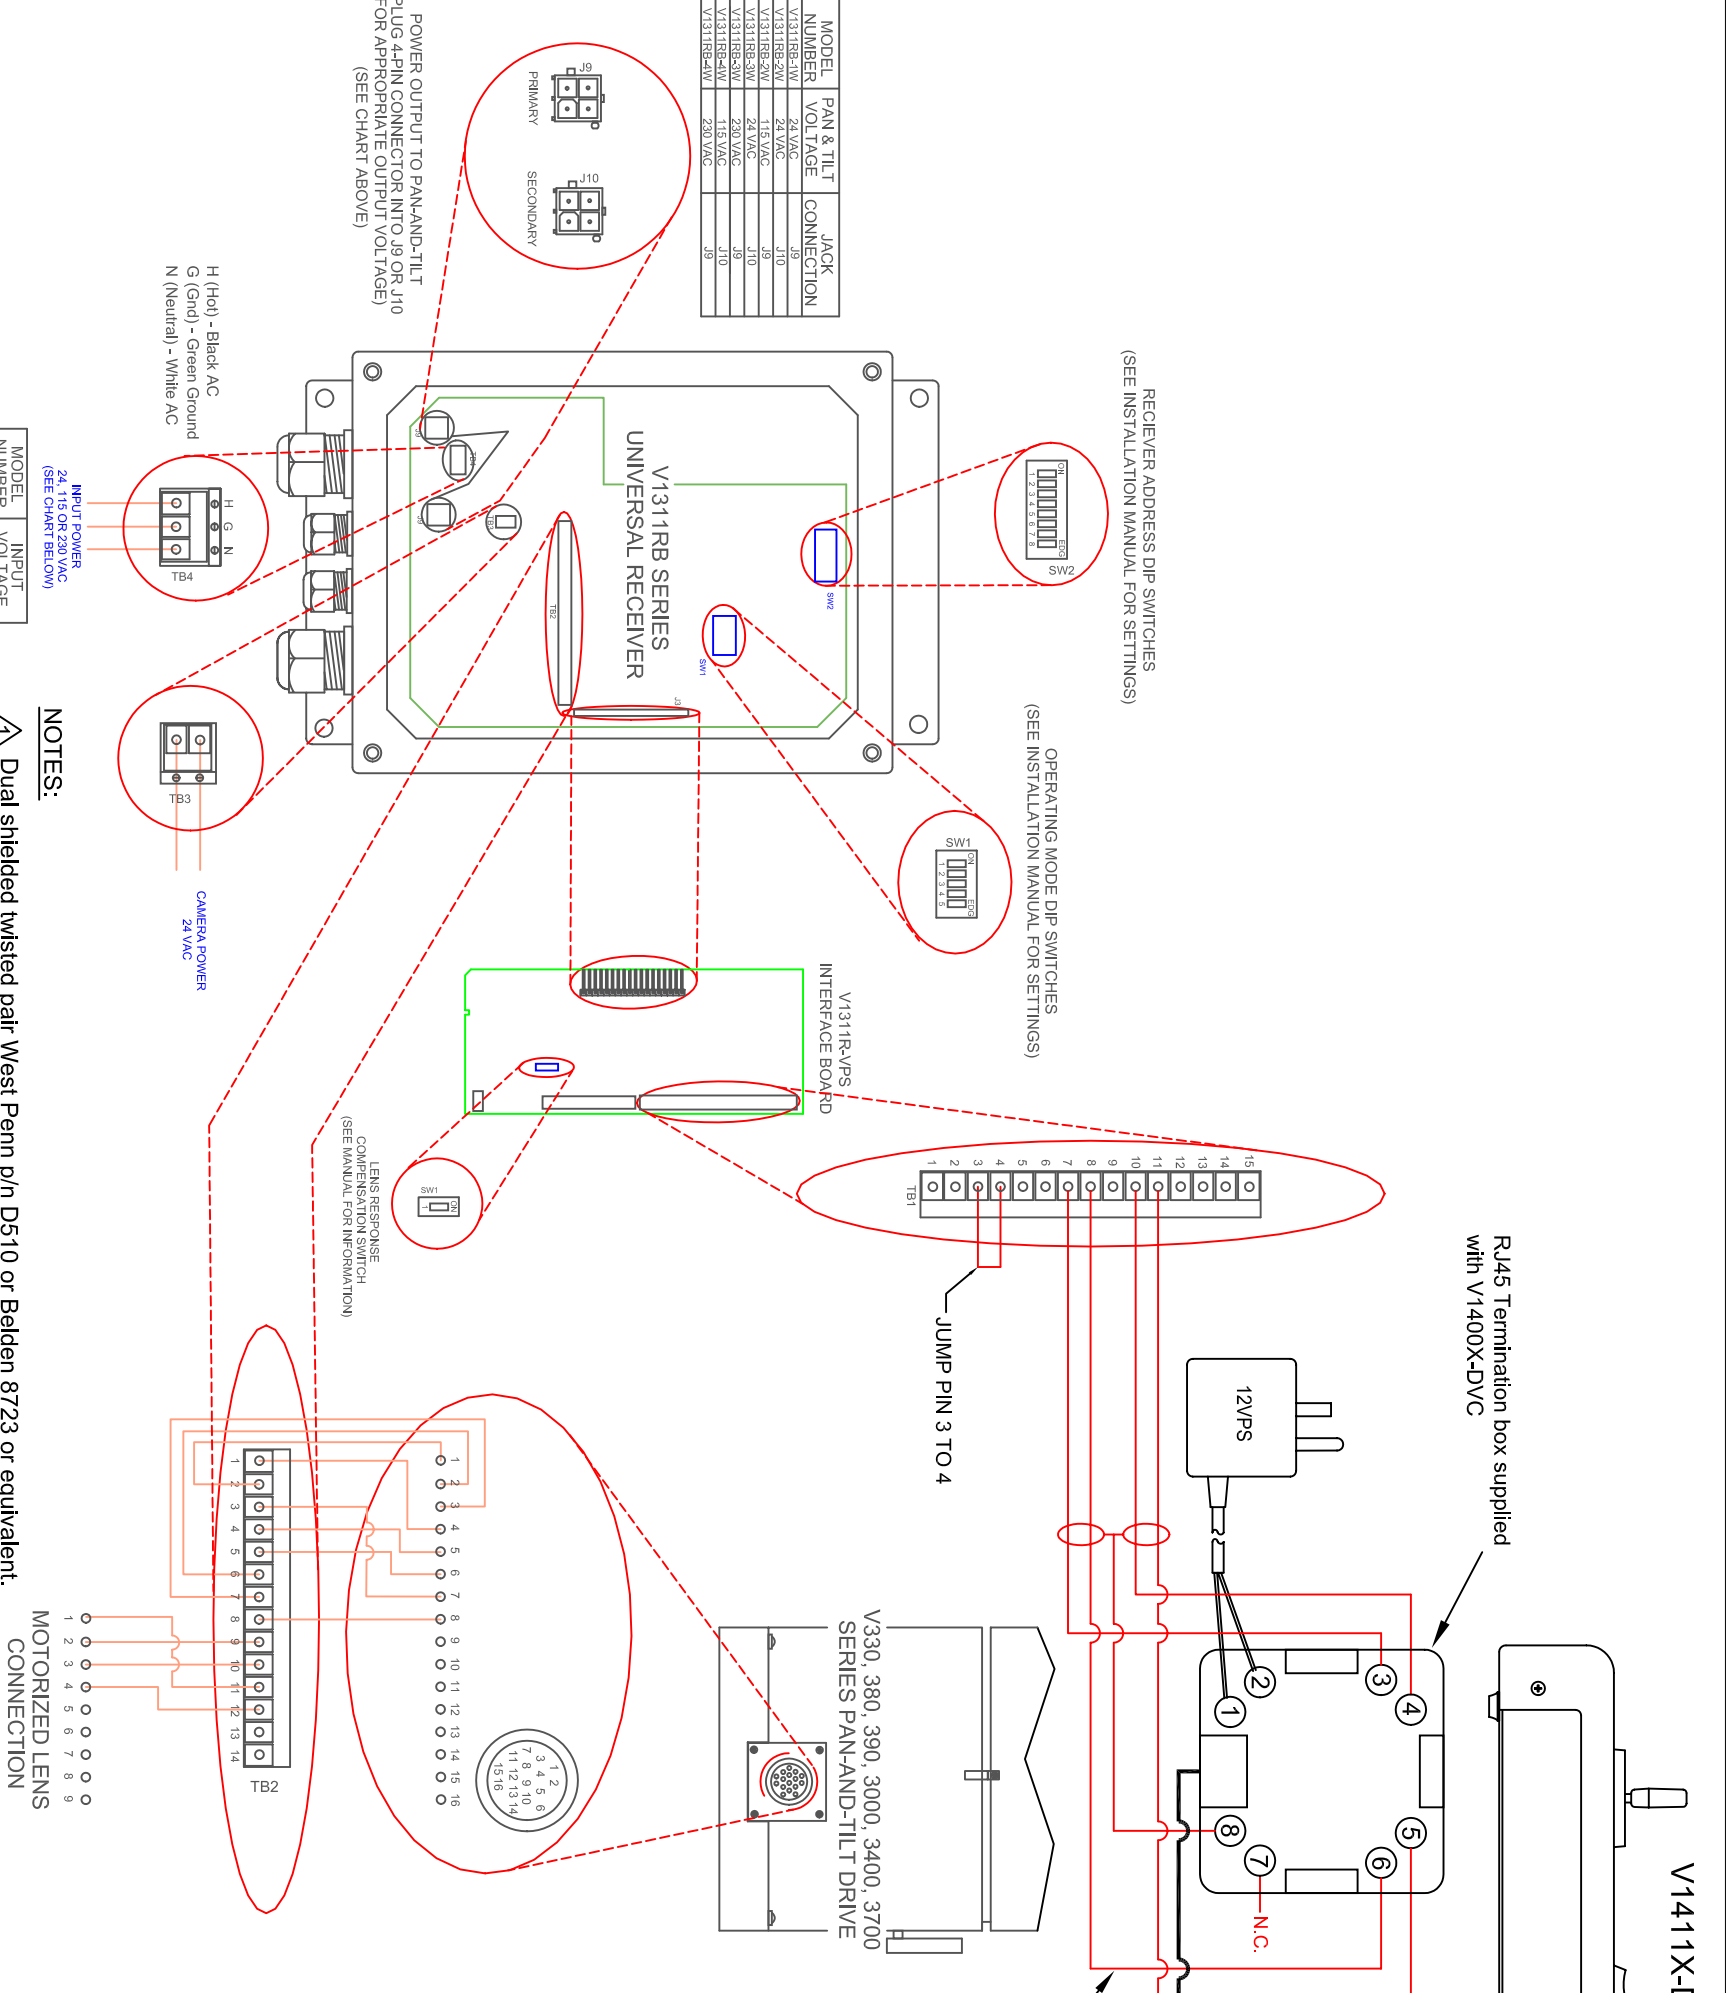

MODEL NUMBER	PAN & TILT VOLTAGE	JACK CONNECTION
V1311RB-1W	24 VAC	J10
V1311RB-2W	115 VAC	J9
V1311RB-3W	24 VAC	J10
V1311RB-4W	115 VAC	J10
V1311RB-5W	230 VAC	J9
V1311RB-6W	230 VAC	J9

MODEL NUMBER	INPUT VOLTAGE
V1311RB-1W	24 VAC
V1311RB-2W	115 VAC
V1311RB-3W	24 VAC
V1311RB-4W	230 VAC

**NOTES:**

▲ Dual shielded twisted pair West Penn p/n D510 or Belden 8723 or equivalent. Not provided by Vicon.

Screw numbers shown on drawing for termination box are for reference only. Numbers in box may vary from different manufactures. Orient as above with Rj45 connector facing down.

This drawing and the contents herein are Copyright 2002 Vicon Industries Incorporated. They are furnished on a confidential basis for the purpose as indicated on the drawing itself. Permission is granted to use and copy this drawing freely provided that (a) the intended usage is the connection and operation of Vicon equipment, and (b) any copies contain this notice in its entirety. Vicon makes no representations as to the operability of any described systems or interconnections unless this drawing is specifically marked for construction.