


RJ45-RJ45 Standard 568-A, 568-B
 straight pinned patch cord
 provided with V1400X-DVC
 (Vicon p/n: 1806-5381-02)

RJ45 Termination box supplied
 with V1400X-DVC

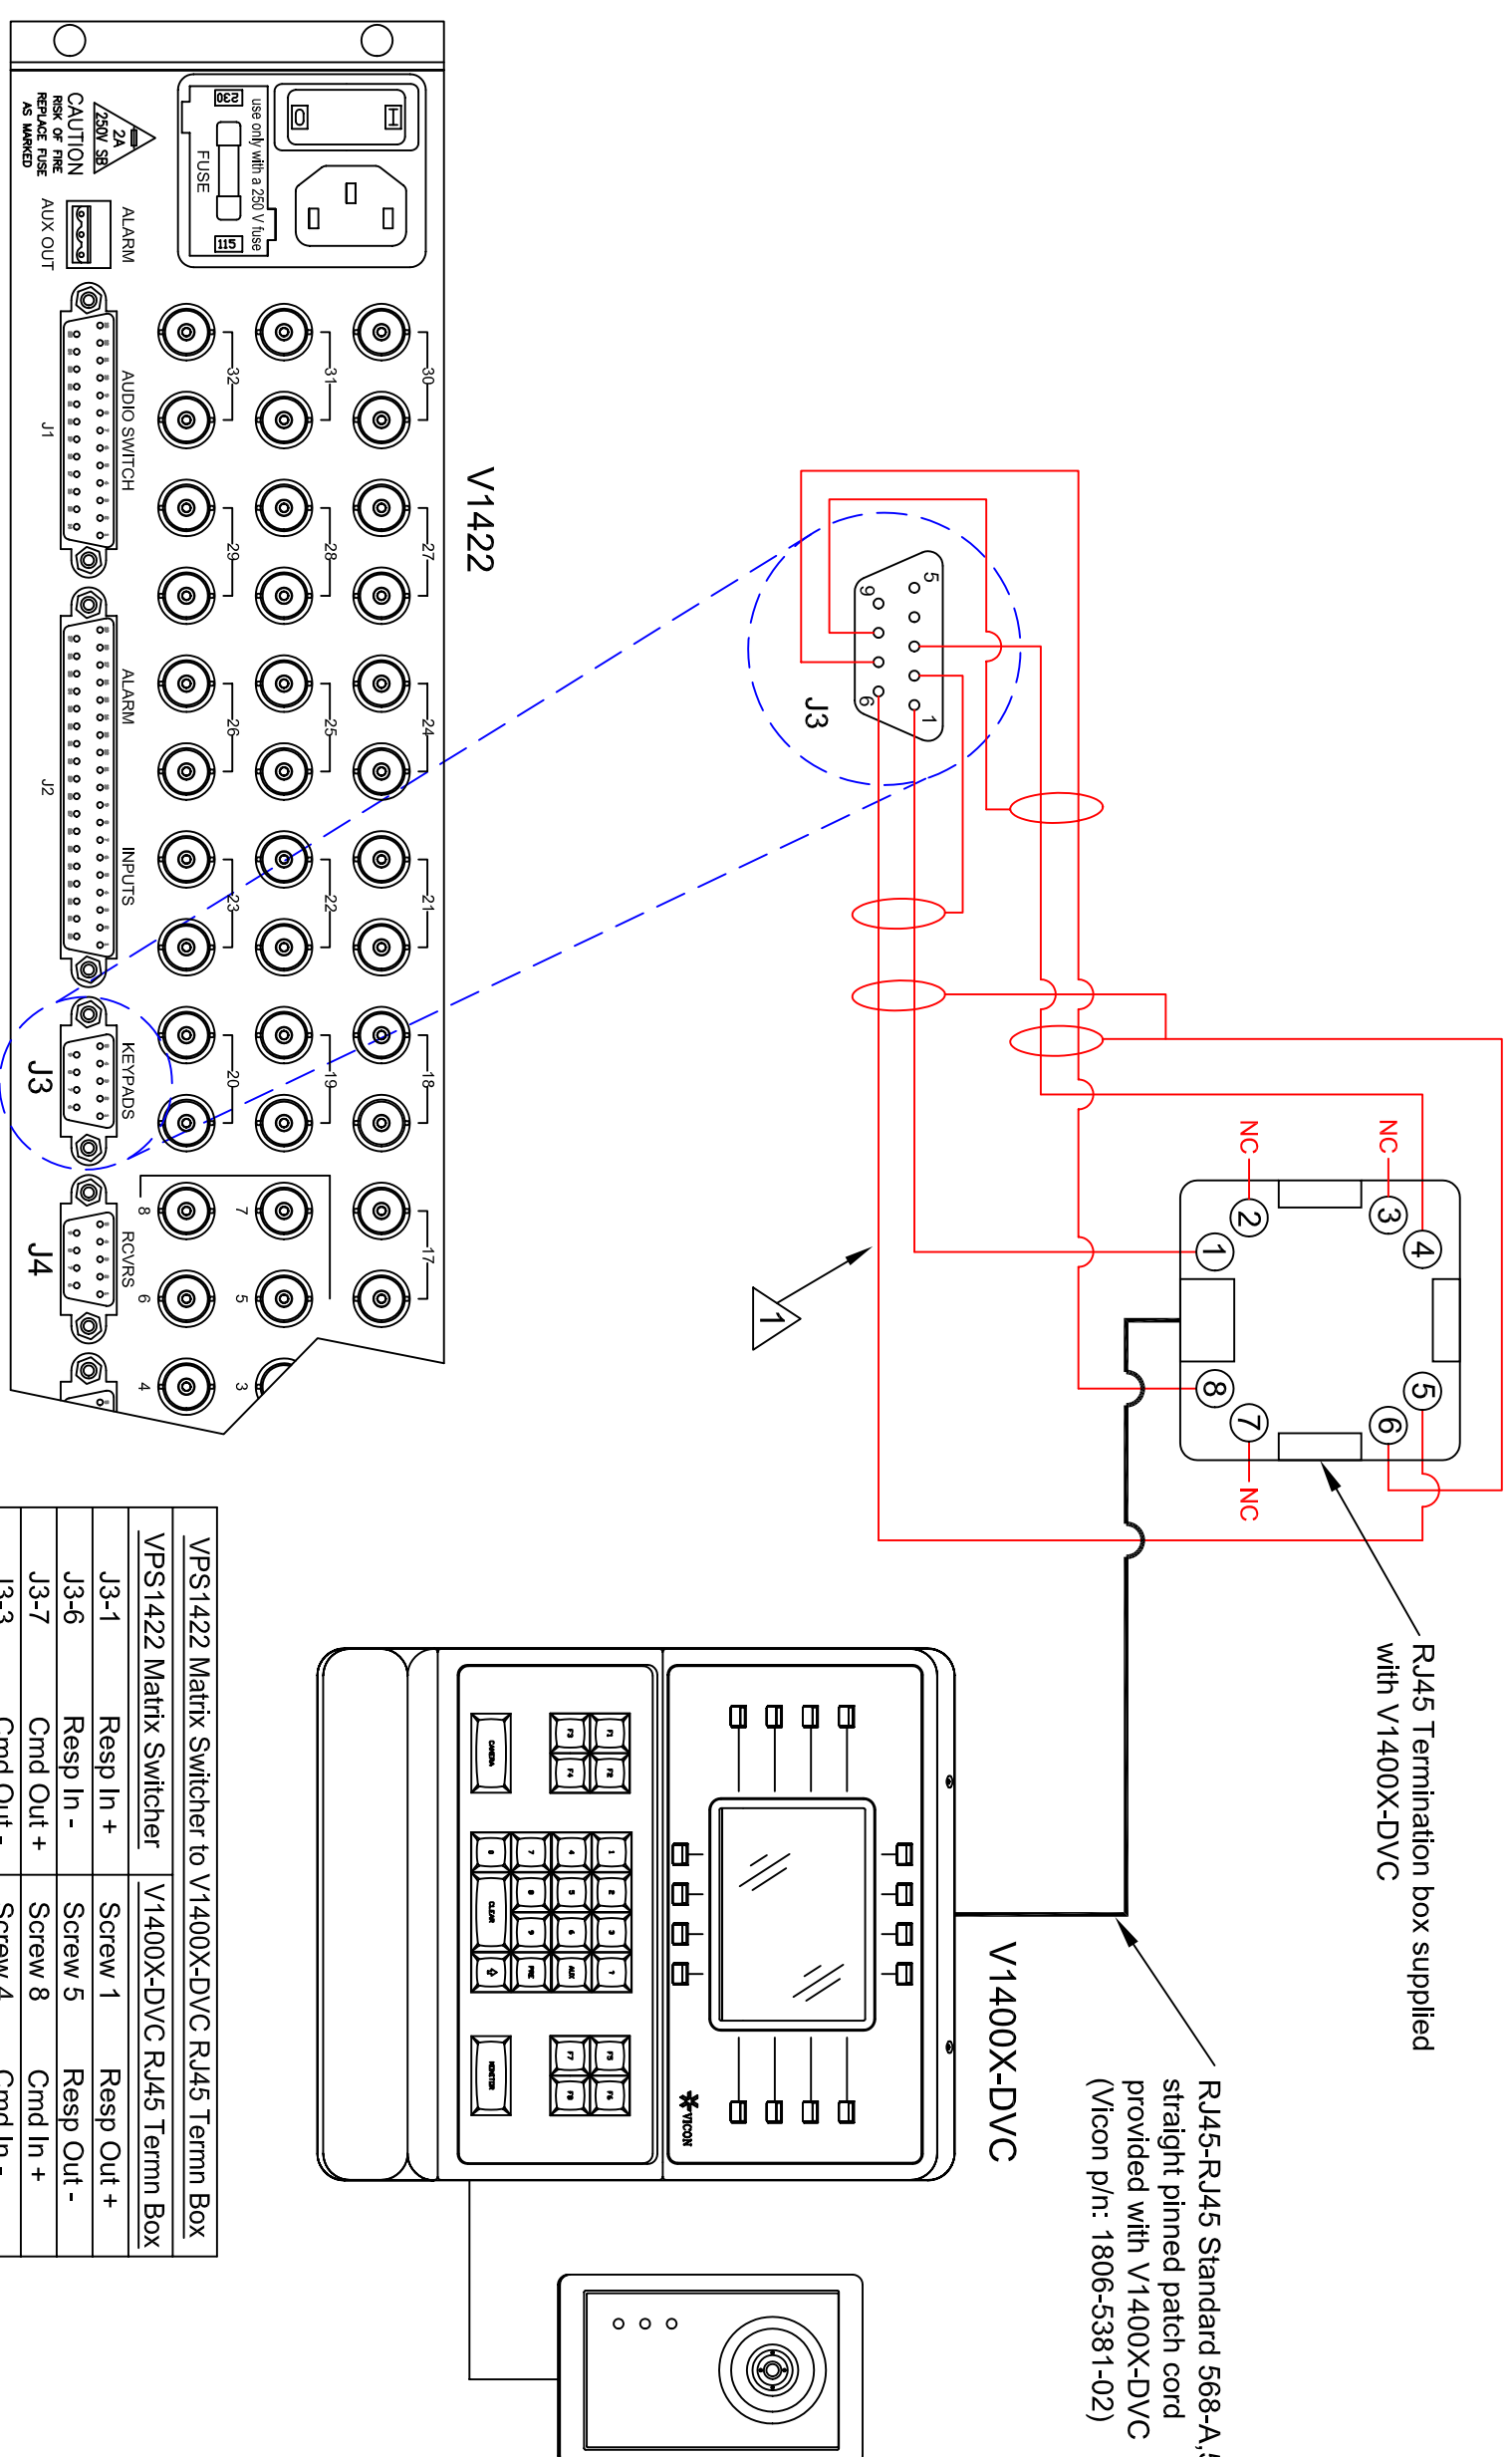

VPS1422 Matrix Switcher to V1400X-DVC RJ45 Termin Box	V1400X-DVC RJ45 Termin Box
J3-1 Resp In +	Screw 1 Resp Out +
J3-6 Resp In -	Screw 5 Resp Out -
J3-7 Cmd Out +	Screw 8 Cmd In +
J3-3 Cmd Out -	Screw 4 Cmd In -
J3-2, 8 Gnd/Shield	Screw 6 Gnd/Shield
—	Screw 2,3,7 No Connection

NOTES:

⚠ Dual shielded twisted pair West Penn p/n D510 or Belden p/n 8723 or equivalent.
 Not provided by Vicon.

Screw numbers shown on drawing for termination box are for reference only. Numbers in box may vary from different manufactures. Orient as above with RJ45 connector facing down.

This drawing and the contents herein are Copyright 2001 Vicon Industries Incorporated. They are furnished on a confidential basis for the specified purpose as indicated on the drawing itself. Permission is granted to use and copy this drawing freely provided that (a) the intended usage is the connection and operation of Vicon equipment, and (b) any copies contain this notice in its entirety. Vicon makes no representations as to the operability of any described systems or interconnections unless this drawing is specifically marked for construction.